


Sizes 3/8" & 1/2" / 10 mm & 15mm

Headloss charts are not to be used for valve sizing

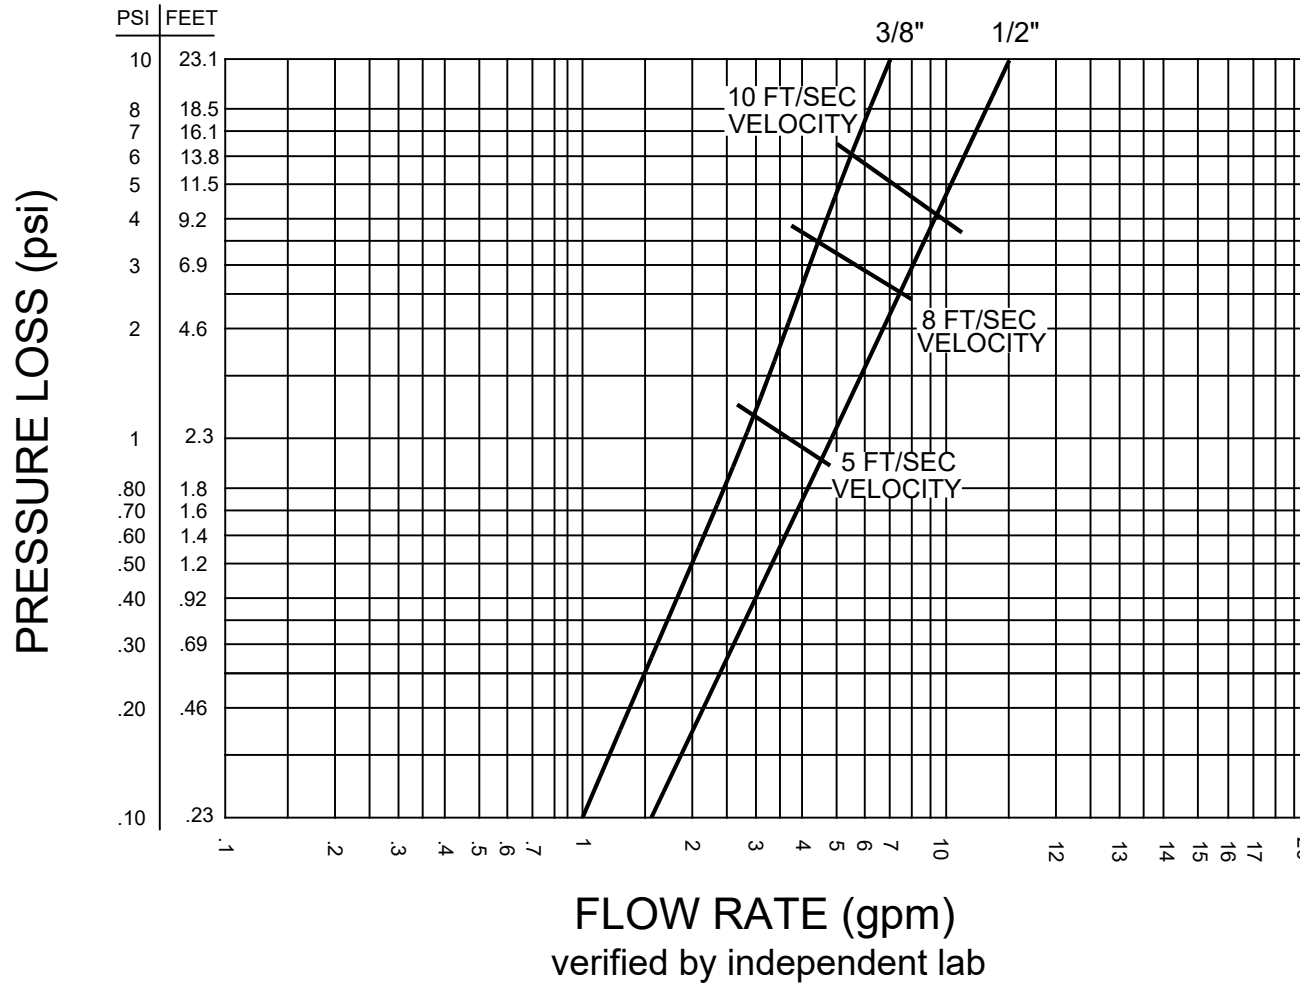

verified by independent lab

SIZE	3/8"	1/2"
Cv	2.4	4.8

Note: For longer service life & higher efficiencies it is recommended that flow velocity be between 2 to 6 feet/second

Fromatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Fromatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2022 Fromatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Fromatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Fromatic Corporation is strictly prohibited. www.flomatic.com