


Silent Check Valve

Headloss Chart

Sizes 2" thru 24" / 50 mm thru 600 mm
 Split Disc Style



Headloss charts are not to be used for valve sizing

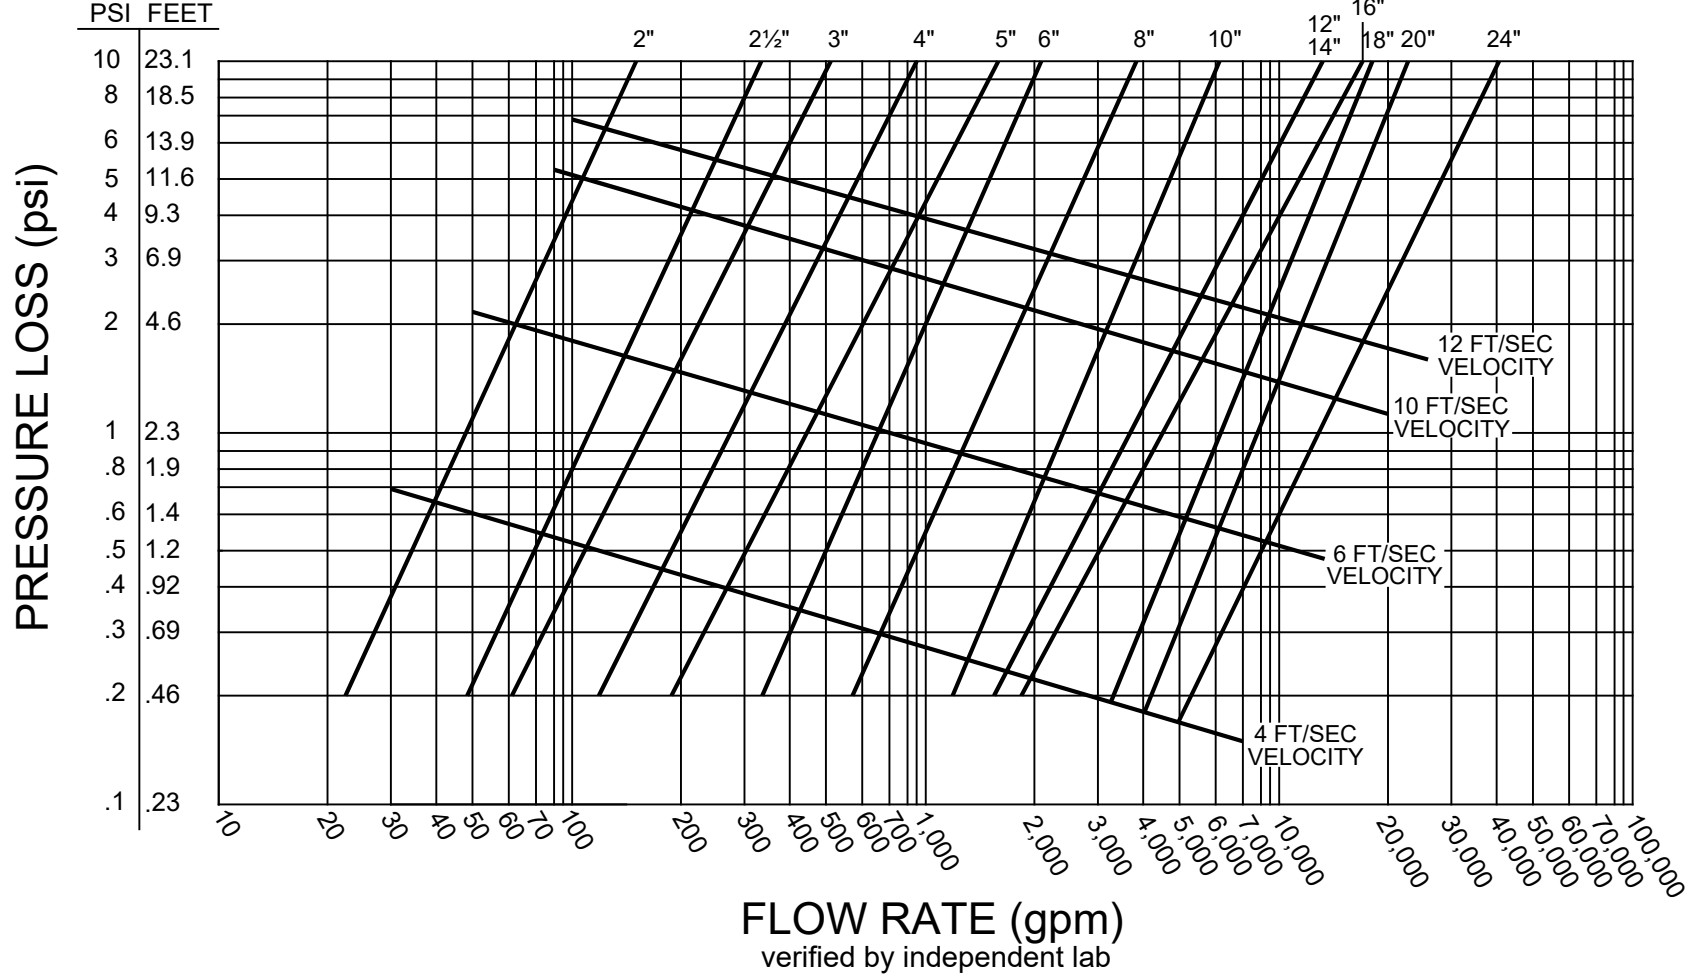

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
Cv	76	161	224	400	648	1,060	1,890	3,340	5,270	5,200	7,200	9,400	12,000	18,500

Note: For longer service life & higher efficiencies it is recommended that flow velocity be between 4 to 12 feet/second

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2022 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com