

Wafer Check Valve

Headloss Chart


Model 888VFD



Sizes 2" thru 6"/ 50 mm thru 150 mm
888S6VFD INCLUDED



Headloss charts are not to be used for valve sizing

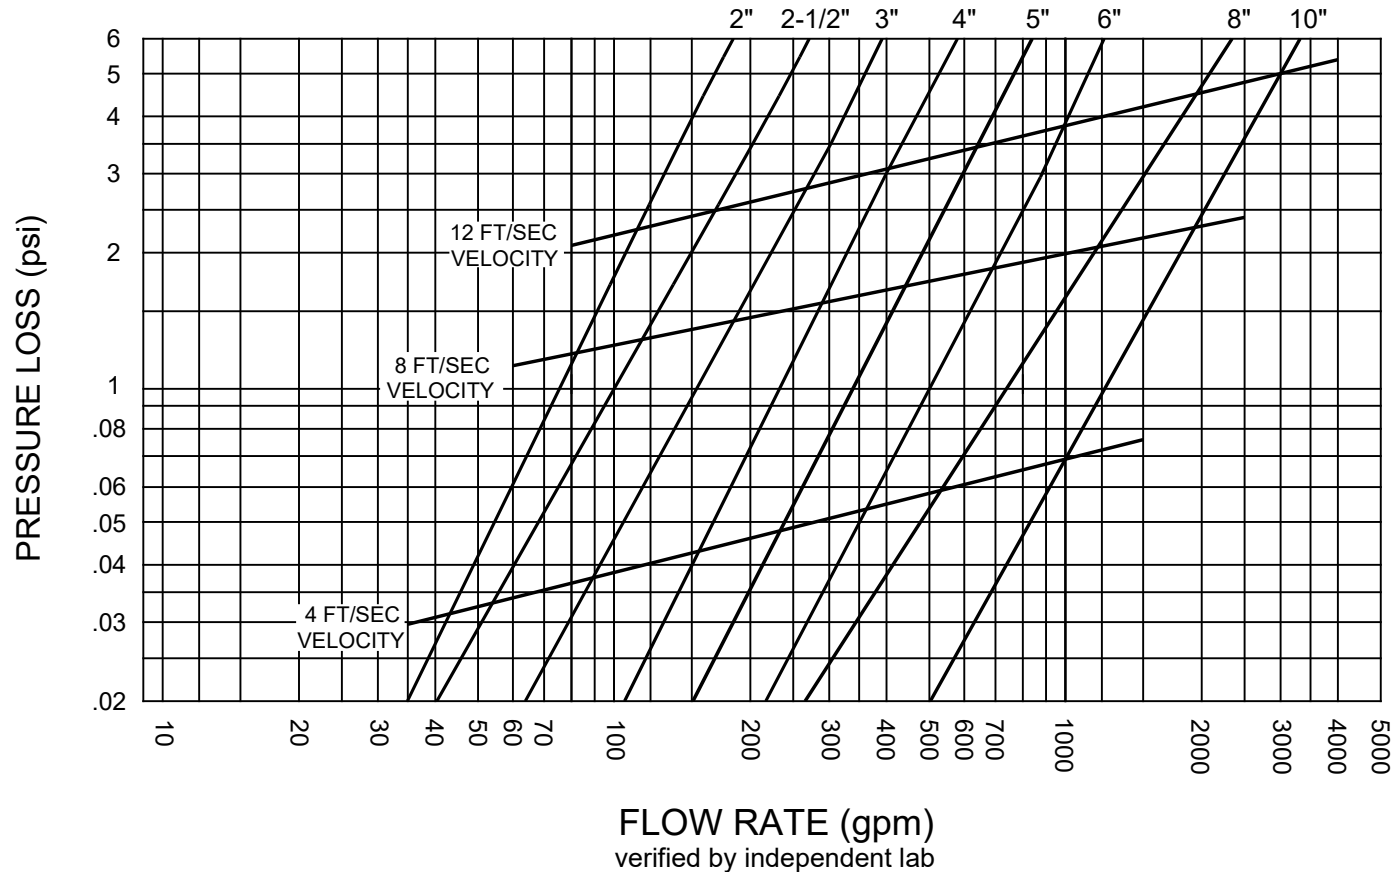

Size	2"	2½"	3"	4"	5"	6"	8"	10"
Cv	77	108	158	234	341	475	746	1247

Note: For longer service life & higher efficiencies it is recommended that flow velocity be between 4 to 12 feet/second

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2022 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

PATENT # 9,611,948



April 27, 2017
Dwg No: S888VFDHL Rev: E (1/22)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798