

Swing Check Valves


Headloss Chart

Model 90 & 92



Sizes 2" thru 24" / 50mm thru 600mm

Headloss charts are not to be used for valve sizing

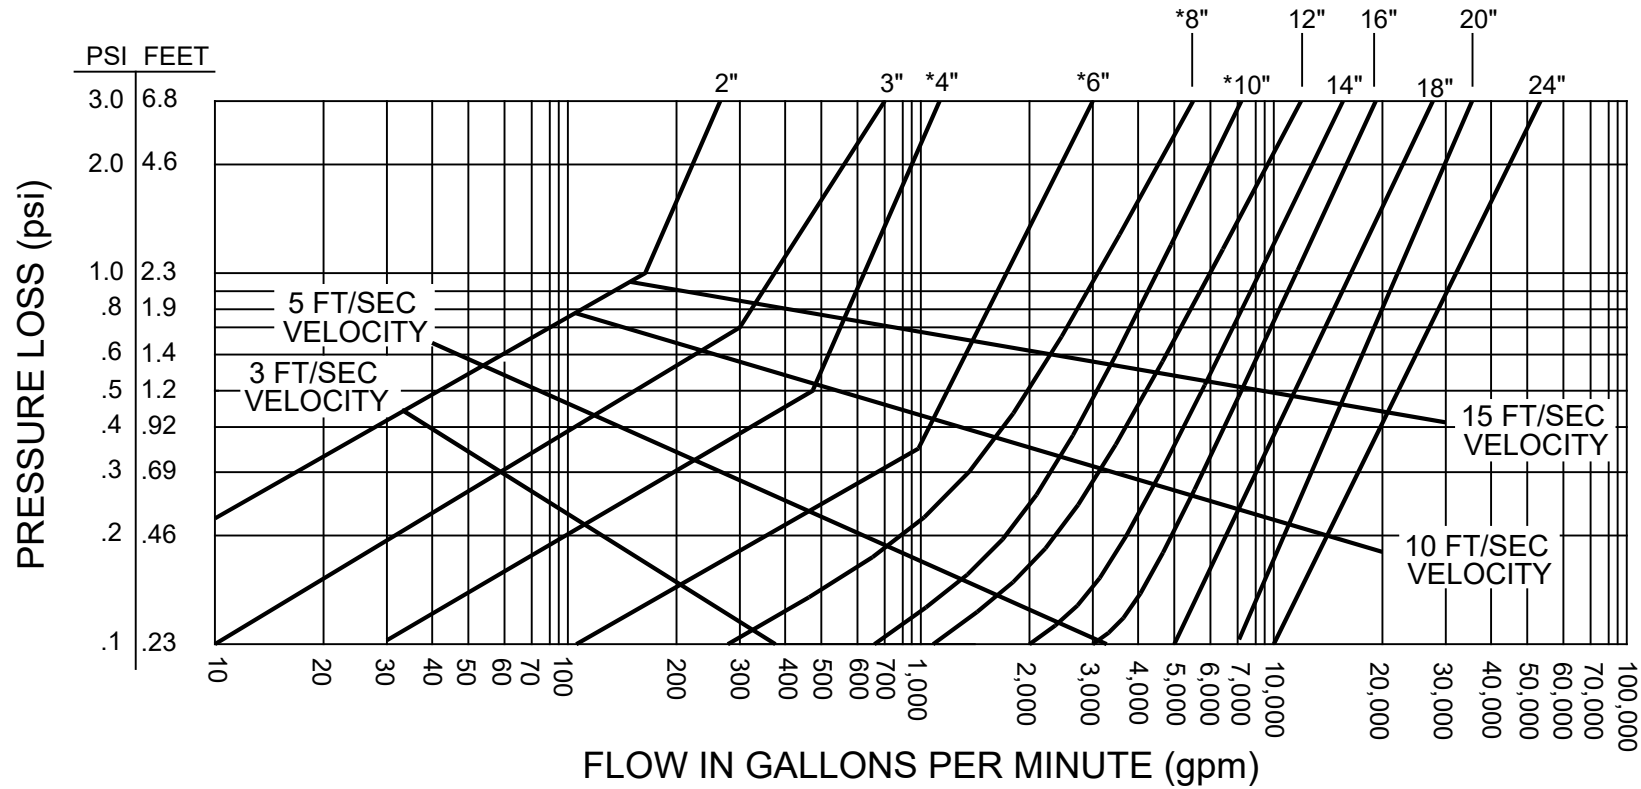

FLOW IN GALLONS PER MINUTE (gpm)

verified by independent lab

Size	2"	3"	*4"	*6"	*8"	*10"	12"	14"	16"	18"	20"	24"
Cv	270	386	626	1,896	3,096	4,574	6,004	8,062	11,135	16,890	22,250	33,356

Note: For longer service life & higher efficiencies it is recommended that flow velocities be between 5 to 10 feet/second

NOTE: SIZES WITH AN * REPRESENT MODEL 92

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2022 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



December 4, 1997
Dwg No: S90HL Rev: C (1/22)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798