

Foot Valve


Sizes 1/2" / 15 mm

Model 60SE

FLOMATIC
Flomatic Corporation

Materials

Enviro Check®

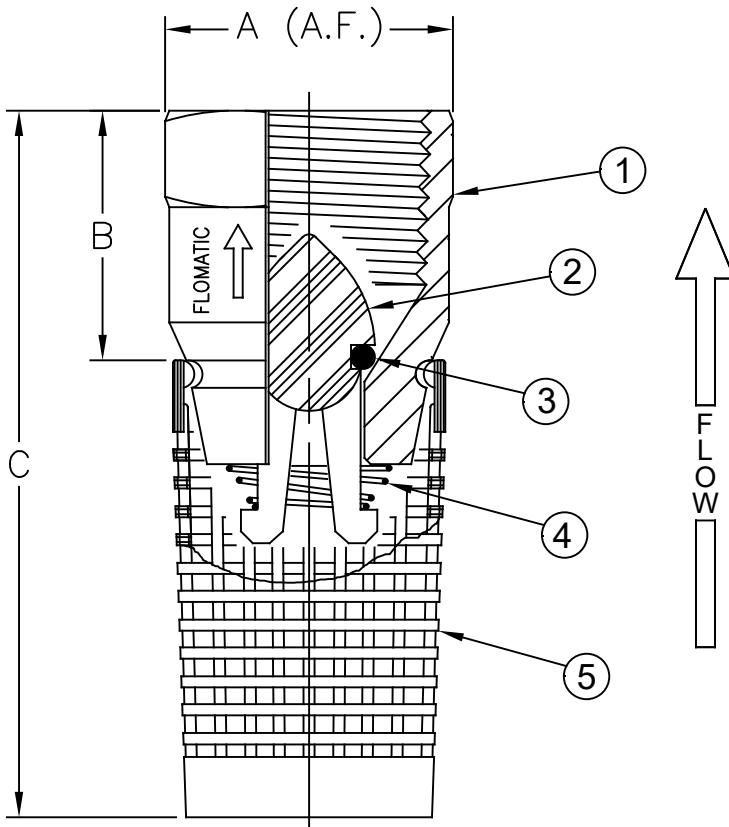

Max Temp 180°F (82°C)
Max Pressure 150psi (10bar)

Item #	Qty	Description	Material	ASTM
1	1	Body	Unleaded Bronze	C89833
2	1	Poppet	Grilamid (Nylon)	LH-3H
3	1	O'Ring	Buna-n	-----
4	1	Spring	Stainless Steel	302
5	1	Screen	Polyethylene	-----

Dimensions (FNPT)

ANSI B1.20.1

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
1/2	15	5820E	1	25	1-1/32	26	2-5/16	59	1/8	.06

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2021 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

FLOMATIC VALVES

June 5, 1997
Dwg No: S5820E Rev H (11/21)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798