

Flomatic Corporation

15 Pruyn's Island Drive

Glens Falls, New York 12801



Tel: 518-761-9797 • 1-800-833-2040

Fax: 518-761-9798 • 1-800-314-3155

www.flomatic.com • flomatic@flomatic.com

Dear Valued Customer:

NOTICE: The valve you have ordered is the optional Metal-to-Metal seated valve that is precision-machined flat and smooth to meet MSS metal leakage criteria. The leakage rate shall not exceed the allowable rate for metal seated valves allowed by AWWA Standard C508 or 1 oz per hour per inch of valve diameter. If your application requires zero leakage at both high and low pressure a resilient seat will be necessary. Please specify by adding "R" to the end of the part number.

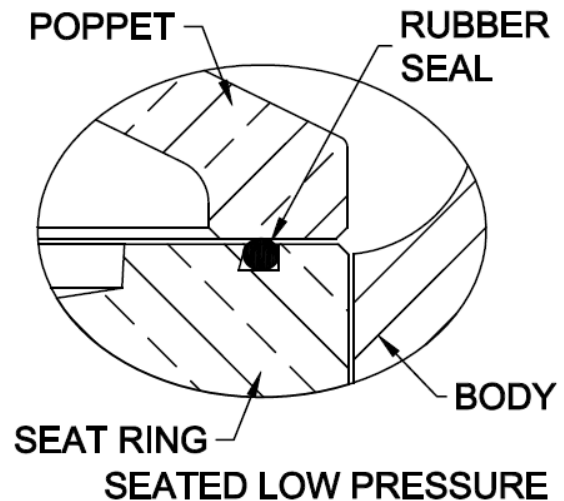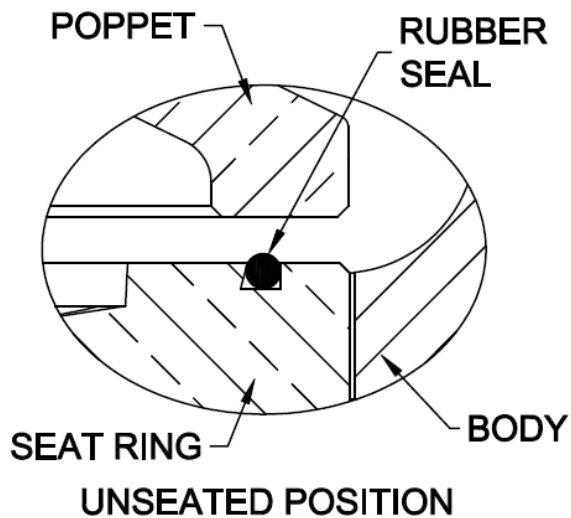

Thank you for your continued support and interest in Flomatic's valve products. Please let us know if we can help you in selecting or specifying any of our growing family of valve products or if you have any questions.

Sincerely,

Nick Farrara

VP Sales & Marketing